TYPICAL SELECTION

NOTES
1 WALLS TO BE BATTERED ON TWO SIDES ONLY.
2 BRICK MASONRY TO BE STUCCOED ON INSIDE AND OUTSIDE WITH ½" MORTAR
3 FLOW LINE OF DRAIN PIPE SHALL BE MINIMUM OF 12" OR 24" FROM THE BOTTOM FOR POSITIVE OR SEEPAGE DRAINAGE, RESPECTIVELY
4 PIPES MAY EXTEND INTO CATCH BASIN A MAXIMUM OF 3"
5 PAVEMENT REQUIRED AROUND ALL CATCH BASINS IN ACCORDANCE WITH STANDARD DETAIL NO SD-2.5
6 MAXIMUM CONCRETE PIPE SIZE 18"
7 WHERE ROCK HAS SUFFICIENT BEARING VALUE CONCRETE CLAB MAY BE REDUCED IN SIZE
8 FOR BOTTOM SLAB DETAILS SEE SD-2 2
9 MORTAR SHALL BE AS SPECIFIED IN SUB-ARTICLE 320.02

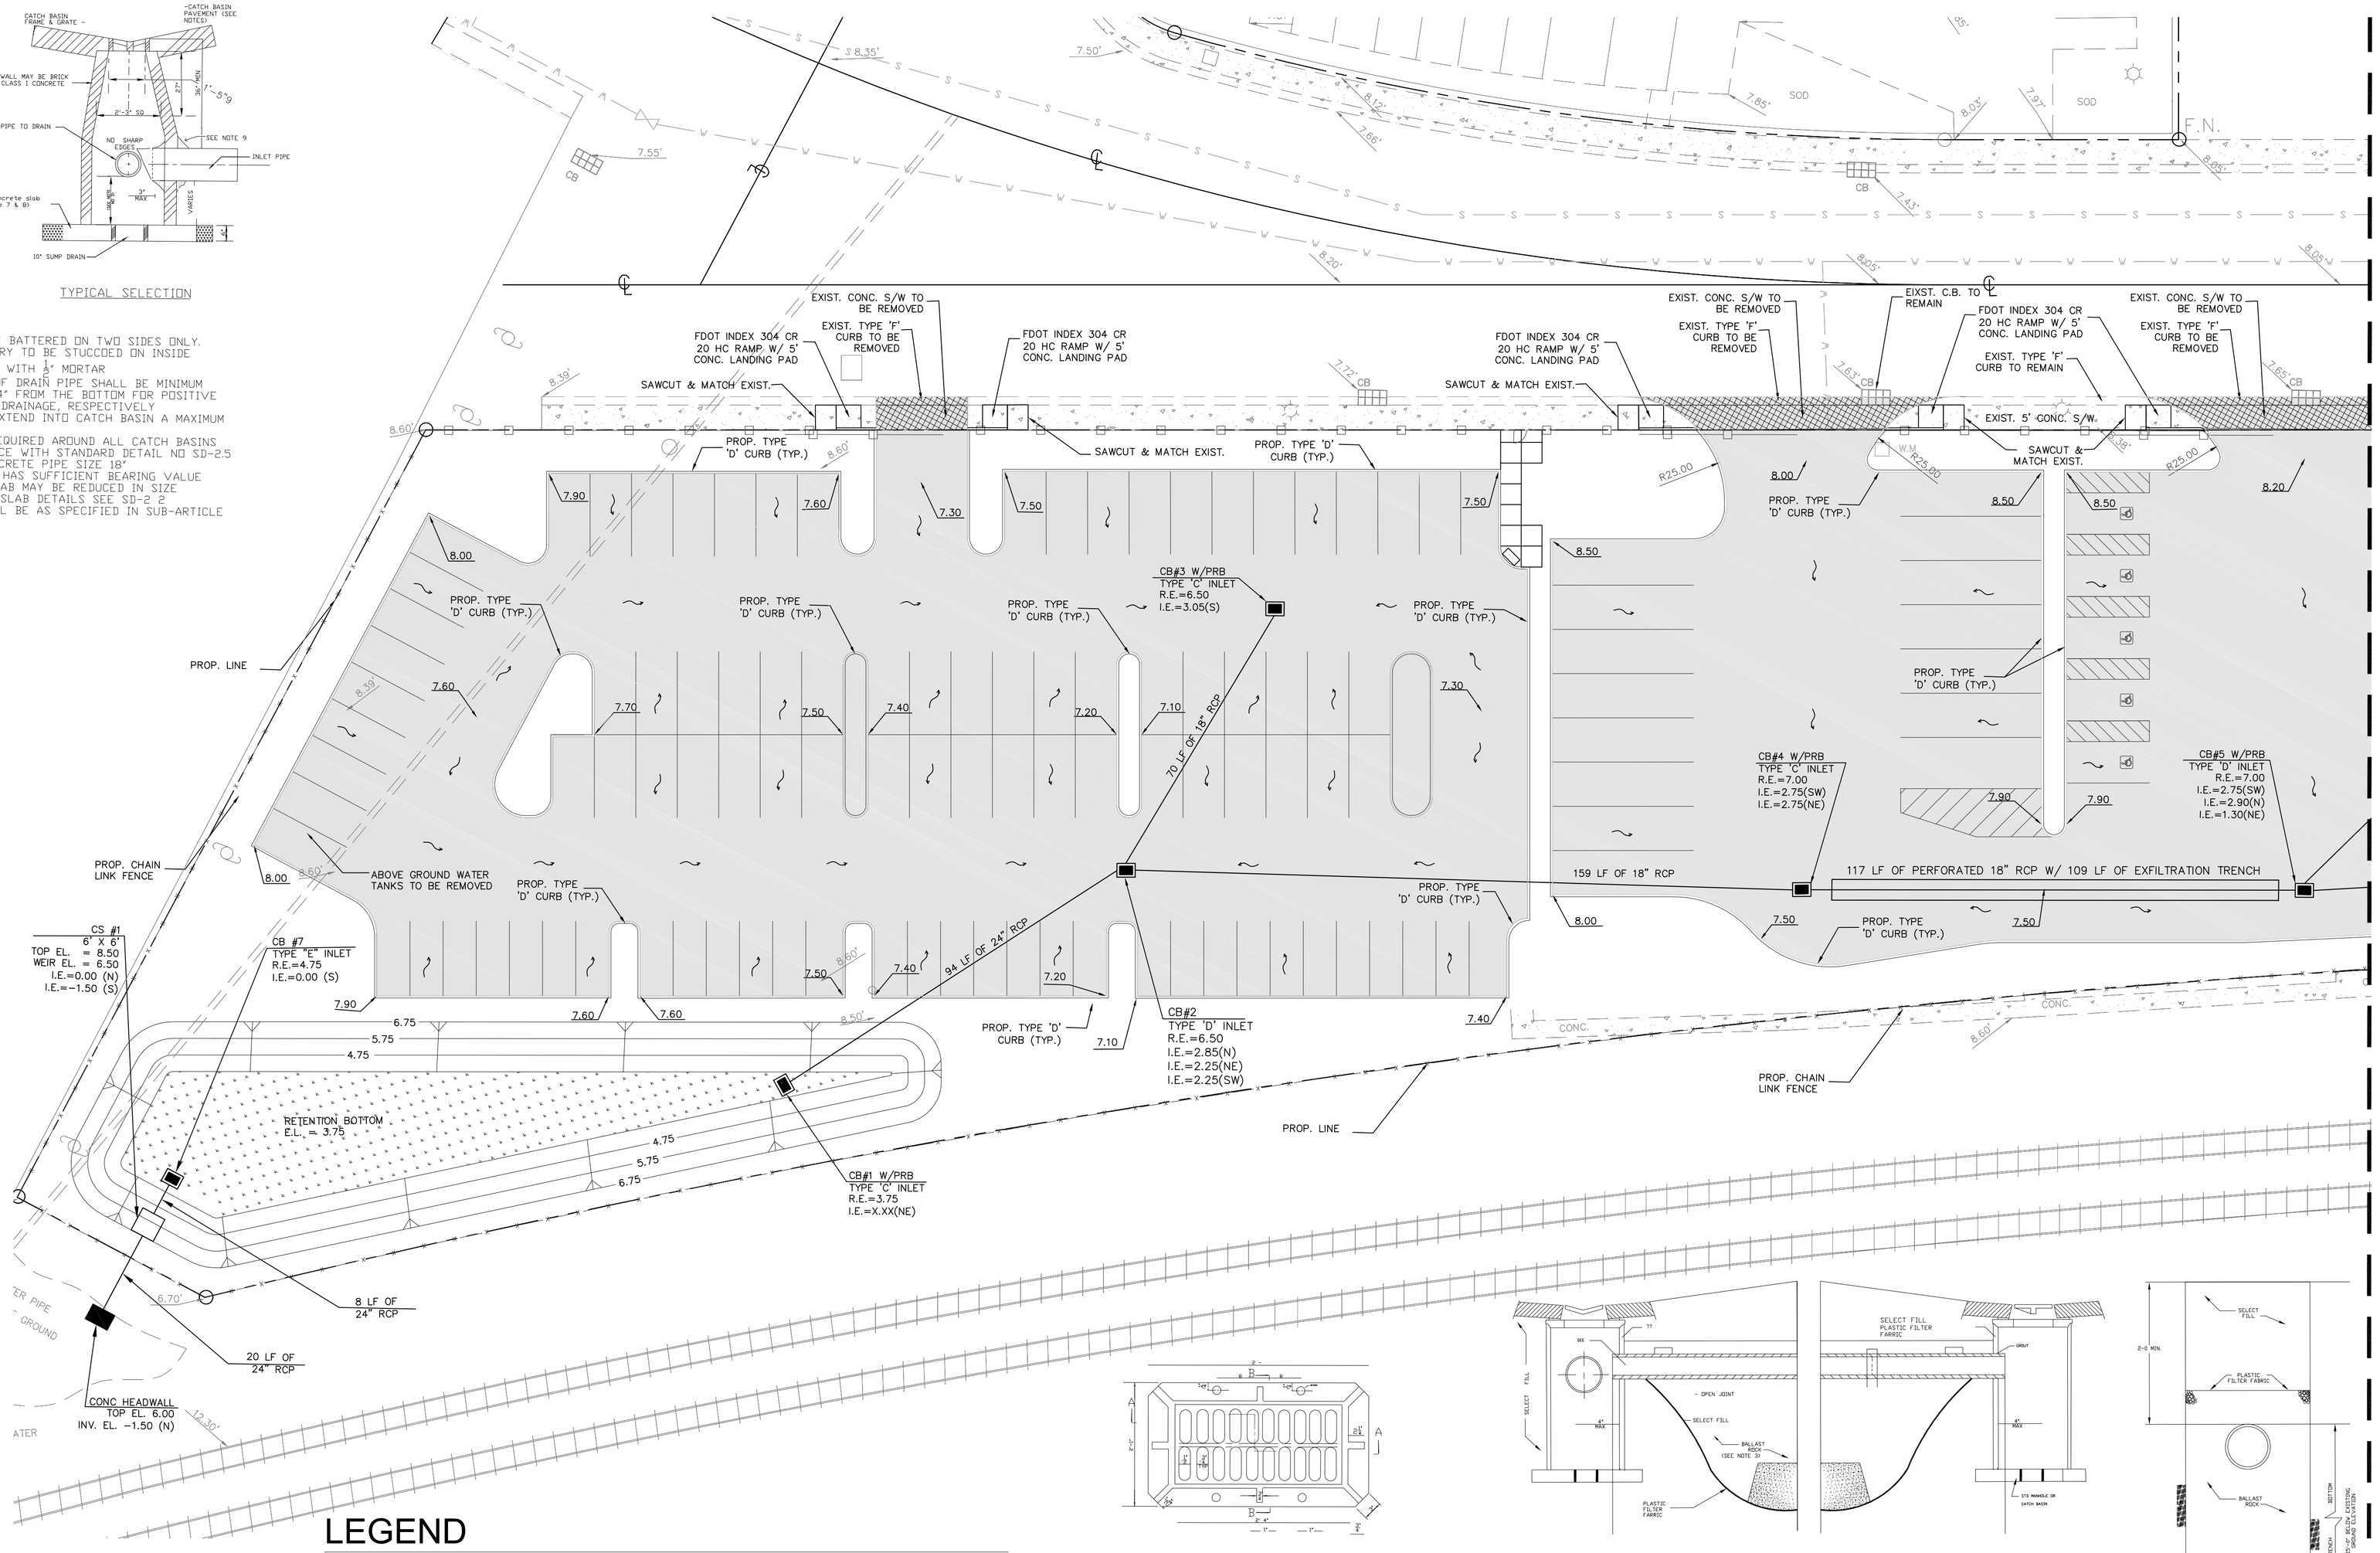

LEGEND

- PROPOSED PARKING LOT
- 3" TYPE S-1 ASPHALT
- 2" TYPE S-1 ASPHALT
- EXISTING SIDEWALK
- PROPOSED SIDEWALK
- EXISTING SIDEWALK AND/OR TYPE 'F' CURB & GUTTER TO BE REMOVED
- RIGHT OF WAY
- PROPOSED SOD
- PROPOSED EXFILTRATION TRENCH
- 8.25 PROPOSED GRADE
- 8.75 EXISTING GRADE
- FLOW ARROW
- PROPOSED CATCH BASIN
- PROPOSED MANHOLE

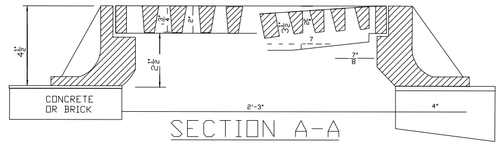

SECTION A-A

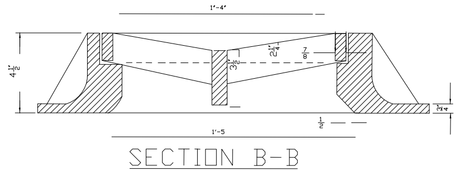

SECTION B-B

LONGITUDINAL SELECTION

NOTES:
1.PLASTIC FILTER FARRIC (AT EA SIDE TOP AND BOTTOM) SHALL BE USED IN SANDY AREAS AS NOTED ON PLANS AND/OR AS DIRECTED BY THE ENGINEER.
2. THE BOTTOM OF THE EXFILTRATION TRENCH SHALL BE 15'-0" BELOW EXISTING GROUND ELEVATION, UNLESS FIELD CONDITIONS WARRANT OTHERWISE.
3. AFTER THE BASLLAST ROCK HAS BEEN PLACED TO THE PROPER ELEVATION, IT SHALL BE CAREFULLY WASHED DOWN WITH CLEAN WATER IN ORDER TO ALLOW FOR INITIAL SETTLEMENT THAT MAY OCCUR. IF IT DOES TAKE PLACE, ADDITIONAL BALLAST ROCK WILL BE ADDED TO RESTORE THE BALLST ROCK TO THE PROPER ELEVATION, SO THAT THE EXFILTRATION TRENCH BE COMPLETED IN ACCORDANCE WITH THE DETAILS.
4. INVERT ELEVATION TO BE AS SHOWN IN W C 2 2 (AVG OCTOBER GROUND WATER LEVEL).

NOTE: IF THIS DETAIL IS TO BE USED FOR PRETREATMENT OF STORMWATER RUN-OFF, THE INVERT OF PIPE TO BE AS SHOWN IN W.C. 2.2, IF PRETREATMENT HAS BEEN PROVIDED THROUTHER MEANS THE INVERT OF PIPE CAN BE LOWER THAN SHOWN IN W.C 2.2

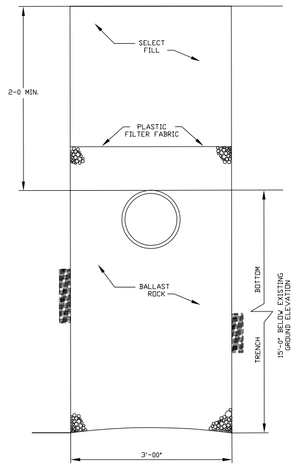

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY AND COPYRIGHT OF WARE MALCOMB AND SHALL NOT BE USED ON ANY OTHER WORK EXCEPT BY AGREEMENT WITH WARE MALCOMB. WRITTEN DIMENSIONS SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS AND SHALL BE VERIFIED ON THE JOB SITE. ANY DISCREPANCY SHALL BE BROUGHT TO THE NOTICE OF WARE MALCOMB PRIOR TO THE COMMENCEMENT OF ANY WORK.

ARAMARK
160 ALI BABA AVENUE
OPA-LOCKA, FLORIDA 33054

ARCO/Murray
National Construction Company, Inc.

architecture
planning
interiors
graphics
State of Illinois Design Firm Registration No. 184-004069
WARE MALCOMB
irvine
los angeles
northern california
sacramento
san diego
denver
chicago
new jersey
phoenix
1900 spring road, suite 210
oak brook, illinois 60523
p. 630.218.8065 f. 630.218.0864

ROSS ENGINEERING, INC.
10400 GRIFFIN ROAD, SUITE 206
COOPER CITY, FLORIDA 33328
(954)680-2730 (954)680-2732 FAX
CERTIFICATE OF AUTHORIZATION No. 9808

ROBERT J. ROSS, P.E.
FLORIDA P.E. No. 59485
DATE: 03/05/2008

PRELIMINARY PAVING, GRADING, AND DRAINAGE

	DATE	REMARKS
1	03/05/08	X

SCALE:	1" = 20'
DRAWN BY:	
JOB NO.:	

SHEET
C 1.0